



TO ASSEMBLE

YOUR TRIARM™ MOBILE DISPLAY No. 8500

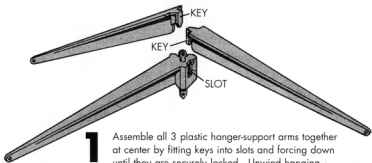

- 1** Assemble all 3 plastic hanger-support arms together at center by fitting keys into slots and forcing down until they are securely locked. Unwind hanging cord from plastic hook. Insert barbed end of cord through hole in top of 3-arm assembly and tie other end securely to slotted hole in bottom of hook.

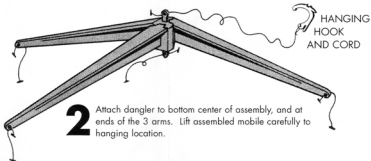

- 2** Attach dangler to bottom center of assembly, and at ends of the 3 arms. Lift assembled mobile carefully to hanging location.

TRIARM™ MOBILE IS DESIGNED TO SUPPORT LIGHTWEIGHT SIGNS AND IS INTENDED FOR INDOOR USE ONLY. CERTAIN DISPLAYS OR ENVIRONMENTS MAY RESULT IN UNSAFE CONDITIONS. INSTRUCTIONS MUST BE FOLLOWED CAREFULLY TO AVOID IMPROPER USE.

WARNING HANGING INSTRUCTIONS



The plastic hook is specially designed to hang securely onto channel strip of lay-in ceiling, light fixtures, over wire and other available overhead conditions. Tie hanging cord tightly to hole in bottom of hook. Long vertical slot at bottom fits into rigid tube of other lifting device for convenient installation.

- 1) MOBILE KITS SHOULD NOT BE USED IN CERTAIN ENVIRONMENTS AS INJURY OR DAMAGE MAY OCCUR.

Mobile kits are designed for indoor use in room temperatures between 50°-80°F. Cooler or warmer environments may reduce the strength of the sign hanging and display components.

- 2) DISPLAY WEIGHT SHOULD NOT EXCEED 1 LB. IF DISPLAY WEIGHT EXCEEDS MANUFACTURER'S RECOMMENDATIONS, THE DISPLAY SHOULD NOT BE HUNG AS FAILURE OF PRODUCT MAY OCCUR.

User should weigh the display to insure mounting will provide adequate support when used with cotton, nylon, elastic or manulament barbed cords.

- 3) STRUCTURES TO WHICH THE FIXTURES ARE ATTACHED MUST BE EVALUATED SEPARATELY.

Ceiling stability should be checked before using Hook & Cord for display purpose. The Hook & Cord is designed for use with a standard 15/16" drop ceiling channel.

- 4) DISPLAY SHOULD NOT BE MOUNTED IN THE DIRECT PATH OF HEATING OR AIR CONDITIONING DUCT.

The excessive motion of the display may weaken the supporting system, including the string and barbs.

- 5) ALL CEILING/HANGING ATTACHMENTS SHOULD BE SECURED ACCORDING TO DIRECTIONS.

Improper use may cause product failure.

• IMPORTANT TO THE PURCHASER.

Purchaser should determine suitability for his/her application of any product herein and assumes all risk and liability whatsoever in connection therewith. Neither the seller or manufacturer shall be liable for any injury, loss or damage direct or consequent arising out of use of such product.